


## Product Presentation



## Application

GT-M45 Bite Tester; It is used to test whether the toys has cracked after bite test, and if it has produced hazardous sharp points, hazardous sharp edges, and hazardous small parts after crack.

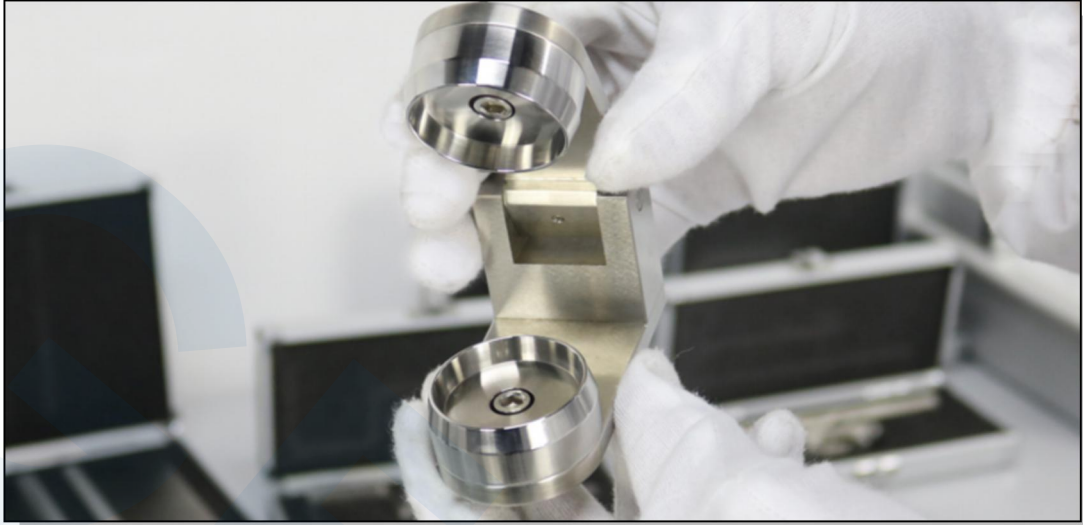

## Test Method

The test article shall be placed in the contact mechanism in any reasonable position for a penetration of 0.25 to 0.5 inch (0.64 to 1.27 centimeters), which position utilizes less than 180 degrees of the arc of the contact mechanism, and a test load shall be evenly applied within 5 seconds. This load shall be maintained for an additional 10 seconds.



## Standards

16 CFR 1500 section 51 and 52 and 53

## Specification

Model	GT-M45
Material	Stainless steel
Dimensions	89 x 42 x 47 mm
Packing dimension	150 x 105 x 70 mm
Weight	1kg

## Accessories

Optional accessories	Optional	IMADA FB-200N Push-Pull Scale
	Optional	GT-MB01 Sharp Edge Tester
	Optional	GT-MB03 Small Part Cylinder
	Optional	GT-MB04 Sharp Point Tester
	Optional	GT-M33 Push-Pull Test Stand